

| 5201-Player

Universal Edge Controller [HDMI Display] Digital Signage





Specification

Model	5201-Player
HARDWARE	
RAM	8 GB
ROM	128 GB
OS	Windows
NETWORK	
Port number	1
Port Type	RJ-45 Connector
Speed	10 / 100 Mbps (Auto Detect)
Protocol	ARP, IP, ICMP, UDP, TCP, HTTP, MQTT, Modbus, DDNS, NTP
Mode	TCP Server / TCP Client / UDP
Setup	HTTP Browser Setup (IE, Chrome, Firefox)
Security	Setup Password
Protection	Built-in 1.5KV Magnetic Isolation
Database	Scheduling Work Report
Scheduling	Manual playback control (optional tablet control)
USB	
Port number	2
Port Type	2 USB Port
SYSTEM	
OS Supported	Windows
Configuration	Web Browser
POWER	
Input	DC 12 V 2000mA @ 12VDC
TEMPERATURE	
Operating	-20°C ~ 75°C
Storage	-40°C ~ 85°C
HUMIDITY	
Operating	10% ~ 95% non-condensing
Storage	5% ~ 95% non-condensing

**Design and specifications are subject to change without prior notice.*

Applications

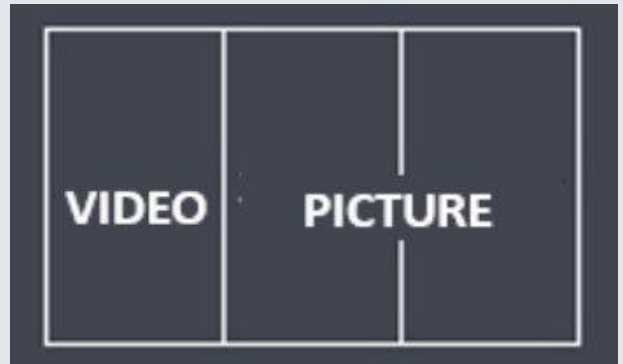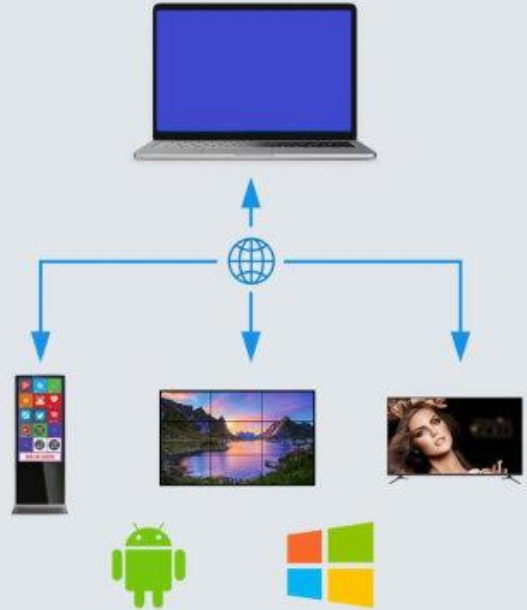

1 Bukit Batok Crescent #05-19 WCEGA Plaza 658064, Singapore
www.vix.com.sg